



New Zealand-Owned & Operated

ANZSF


Paint Protection Film

New Zealand-Owned & Operated

ANZSF Paint Protection Film: Technical Data Sheet

ANZSF PPF is specially formulated paint protection film consists of high performance Pressure sensitive adhesive, ultra clear TPU film and unique self healing coating to protect automotive paint surfaces, from harmful effects of stone chips and abrasion.

Product Construction:

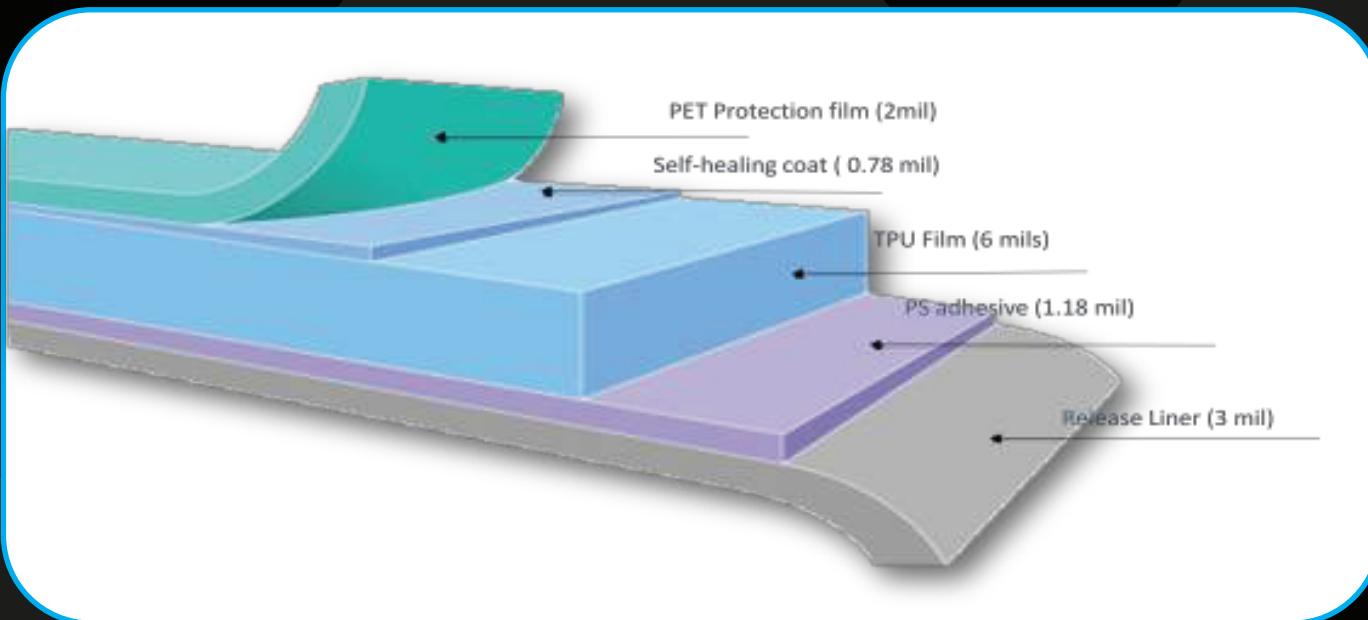

Key Features:

- ✓ Excellent optical clarity
- ✓ Excellent stain resistance
- ✓ Self healing property
- ✓ Hydrophobic
- ✓ Anti yellowing
- ✓ Excellent chemical resistance
- ✓ Easy for installation on curved surfaces

New Zealand-Owned & Operated

Performance Properties:

Sr. No.	Properties	Testing Standards	Measurement Unit	Typical Values
Mechanical Properties				
1	Peel strength: 20 min @24°C	FTM 01	kg/in	> 0.8 kg/ inch
2	Peel strength: 72 Hrs @24°C	FTM 01	kg/in	> 1.2 kg/ inch
3	Gloss at 60°	ASTM D-2457	%	> 85%
4	Tensile Strength	ASTM D-882	Mpa	>20
5	Elongation	ASTM D-882	%	>250
Aging Performance				
6	Heat ageing 80° C/ 16 Days	Internal	-	Pass- No Detrimental Effect
7	Water immersion	400 hrs at 40°C	-	Pass- No Detrimental Effect

New Zealand-Owned & Operated

Sr. No.	Properties	Testing Standards	Measurement Unit	Typical Values
8	Stain Resistance			
A	Water and soap resistance	Drop test for 10 min	-	Pass- No Detrimental Effect
B	Battery acid	Drop test for 10 min	-	Pass- No Detrimental Effect
C	Diesel	Drop test for 10 min	-	Pass- No Detrimental Effect
D	SAE Motor oil	Drop test for 10 min	-	Pass- No Detrimental Effect
E	Hydraulic oil	Drop test for 10 min	-	Pass- No Detrimental Effect

Application Conditions:

Vehicles surface and ambient air temperature should be between 20°C to 30°C. Application should be done in a dust free area and away from direct sunlight.

Storage Condition:

The Shelf life of this film is one year when stored in its original packaging at the temperature ranging from 18 to 26 ° C and Relative Humidity 50 to 60 %.